



GB04/04204



INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8QQ

21 OCT 2004

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

*Le Behan*

Dated

8 October 2004

BEST AVAILABLE COPY

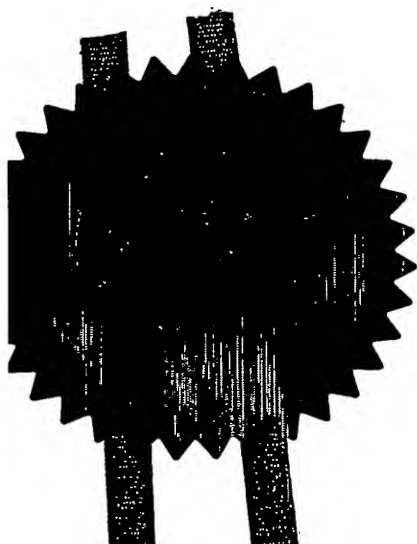



170CT03 E845208-1 002805  
P01/7700 000-0324279.9

1/77

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference M03B302/ASB

2. Patent application number  
(The Patent Office will fill in this part)

0324279.9

16 OCT 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

The BOC Group plc, Chertsey Road, Windlesham, Surrey, GU20 6HJ

Patents ADP number (if you know it)

884627002 ✓

If the applicant is a corporate body, give the country/state of its incorporation

England

4. Title of the invention

PUMP ENCLOSURE

5. Name of your agent (if you have one)

Andrew Steven BOOTH

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

The BOC Group plc, Chertsey Road, Windlesham, Surrey, GU20 6HJ

Patents ADP number (if you know it)

884627002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

- Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	6
Claim(s)	3
Abstract	1
Drawing(s)	8 + 8 <i>He</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents	0
Translations of priority documents	0
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	0
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	0
Any other documents (please specify)	0

11.

I/We request the grant of a patent on the basis of this application.

Signature

*AS Booth*

Date

15/10/2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Andrew Steven Booth  
(01276) 807612

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

**PUMP ENCLOSURE**

This invention relates to a pump enclosure.

5 Traditionally, control circuitry for a pump is located in dedicated enclosures mounted on the external walls of the pump enclosure. This serves to maximise the spacing of the temperature-sensitive circuitry from the pump, which, during use, can typically generate temperatures of up to 150°C. However, mounting such enclosures externally on to the pump enclosure increases both the weight  
10 and the foot-print of the pump enclosure. Whilst these enclosures may be mounted on to the internal walls of the pump enclosure to reduce the foot-print, cooling fans would be required to prevent over-heating of the control circuitry during use of the pump. The use of such fans would increase power consumption and costs, and the air disturbance caused by the fans could be detrimental to, for  
15 example, a clean room in which the pump being used.

It is an aim of the present invention to minimise the foot-print of a pump enclosure without the need for air cooling fans for the pump control circuitry.

20 In a first aspect, the present invention provides a pump enclosure comprising a base, a cover, a plurality of pillars each detachably connected at one end thereof to the base and at the other end thereof to the cover, wherein at least one of the pillars comprises interconnected extrusions defining therebetween a housing for pump control means.

25 As used herein, the term "pillar" connotes any upright load-bearing member, such as a column, post, wall or the like forming part of the framework of the pump enclosure.

30 Providing a "hollow" pillar for the pump enclosure can provide a robust housing for the control circuitry for the pump that reduces the foot-print of the pump enclosure in comparison to prior arrangements where the control circuitry is mounted

externally of the pump enclosure. The control circuitry can be conveniently mounted on one extrusion prior to the interconnection of the extrusions to form a housing surrounding the control circuitry. The extrusion proximate the pump can effectively serve as a heat shield for the control circuitry, enabling the control circuitry to be located within close proximity of the pump without undesirable heating of the control circuitry during use.

The pillar is thus a multi-functional component of the pump enclosure; as well as providing a load bearing support for the pump enclosure, which protects the pump from external damage, the pillar can provide a robust enclosure for the control circuitry, which protects the control circuitry from external damage and from heat generated during use of the pump. Forming the pillar from extrusions provides manufacturing advantages; extrusions have constant strength and other mechanical properties along the length thereof, tolerances on extrusions are substantially constant, and extrusion dies having complex profiles are relatively cheap and straightforward to manufacture.

By forming the extrusions from thermally conductive material, the pillar can provide at least part of a heat sink for dissipating heat generated by the pump during use. In a preferred arrangement, at least one of the extrusions comprises means for receiving a heat exchange mechanism for conveying heat away from the pillar. For example, at least one of the extrusions may be profiled to receive a water cooling circuit, for example at least one pipe through which coolant fluid passes, in use, so that heat can be transferred from the pillar to water flowing in the pipe.

Control circuitry typically comprises one or more printed circuit board assemblies, and so advantageously at least one of the extrusions is profiled to receive a printed circuit board assembly. This can facilitate location of the assembly on the extrusion before the extrusions have been connected together. The outer extrusion conveniently has at least one aperture for receiving connectors, such as leads, power cables and the like, for the control circuitry.

Preferably, one of the extrusions comprises a plurality of projections for engaging correspondingly-profiled surfaces of the other extrusion to connect the extrusions together. This can facilitate interconnection of the extrusions.

5 The extrusions are preferably formed from metal, advantageously from corrosion-resistant aluminium. Preferably, the extrusions comprise a plurality of apertures for receiving bolt means for detachably connecting the pillar to the base and the cover.

10 In one arrangement, the pillar comprises a corner pillar, and wherein one of the extrusions comprises a substantially L-shaped extrusion providing an outer wall for the corner pillar. Thus, in a second aspect the present invention provides a corner pillar of a pump enclosure, the pillar comprising interconnected extrusions defining therebetween a housing for pump control means, the extrusions being preferably  
15 formed from thermally conductive material to dissipate heat away from the pump control means.

Preferably, the base comprises at least one metal, for example, aluminium, extrusion. The base may comprise a plurality of interconnected metal extrusions.

20 The base extrusion(s) may be profiled to receive a number of components, for example, at least one pipe through which coolant fluid passes, in use, a plurality of wheels for the enclosure, and/or one or more electrical cables.

Preferred features of the present invention will now be described, by way of  
25 example only, with reference to the accompanying drawings, in which:

Figure 1 illustrates a right side view of a pump enclosure;

Figure 2 illustrates a left side view of the pump enclosure of Figure 1;

30

Figure 3 illustrates a rear view of the pump enclosure of Figure 1;

Figure 4 is a right side view of the pump enclosure of Figure 1 with the cover and three corner pillars removed;

Figure 5 illustrates a partial perspective view of the pump enclosure as shown in Figure 4;

Figure 6 illustrates a partial perspective view of the pump enclosure as shown in Figure 5 with the pump removed;

Figure 7 illustrates a perspective view of an inner extrusion of a corner pillar;

Figure 8 illustrates a perspective view of an outer extrusion of a corner pillar; and

Figure 9 illustrates top views of the extrusions of Figures 7 and 8.

With reference first to Figures 1 to 3, a pump enclosure 100 for a pump 102 comprises a chassis, or base, 104, four pillars 106, 108, 110, 112 each located at a respective corner of the base 104, and a cover 114.

The base 104 comprises an extruded member, or extrusion, having slots formed therein for receiving, inter alia, wheels 116 and feet 118 for the enclosure, and power leads and other electrical cables (not shown) for the pump 102. The base 104 may comprise a single extrusion, or a plurality of extrusions bonded together. The base 104 is preferably formed from aluminium, which is a relatively cheap, lightweight, corrosion resistant material having sufficient mechanical strength to enable the base 104 to support the pump 102 and the remainder of the enclosure 100. Corner pillars 106, 108, 110 and 112 are also preferably formed from aluminium extrusions (the structure of corner pillar 112 is described in more detail below). Cover 114 may be formed from steel or any other suitable material.

With reference now to figures 4 to 9, corner pillar 112 comprises an inner extrusion 120 connected to a substantially L-shaped outer extrusion 122. The inner and

outer extrusions 120, 122 define therebetween a housing 124 for enclosing one or more printed circuit board assemblies 126 for controlling the pump 102. As shown in Figures 8 and 9, the outer extrusion 122 is formed with a slot 128 for receiving the assembly 126. The outer extrusion 122 is also formed with a number  
5 of apertures 129 to enable leads and power cables to be connected to internal interfaces 127a of the assembly 126, and/or to allow external interfaces 127b mounted on the outer wall to interface with the assembly 126.

The outer extrusion 122 is formed with a number (two shown in the figures,  
10 although any suitable number could be provided) of projections 130 which engage with corresponding surfaces 132 on the inner extrusion 120 to allow the extrusions to be connected together, for instance by sliding one extrusion relative to the other, to define the housing 124 for the assembly 126. The inner extrusion 120 is formed with a number of apertures 138 for receiving bolts or the like for connecting  
15 the pillar 112 to the base 104, and the outer extrusion 122 is formed with a number of apertures 139 for receiving bolts or the like for connecting the pillar 112 to the cover 114.

The extrusions 120, 122 further include fins 134, 136, respectively, which can  
20 provide a relatively large area of contact between the extrusions 120, 122 when connected together. Depending on manufacturing tolerances, this can allow heat generated by the pump 102 during use to be transferred from the inner extrusion 120 to the outer extrusion 122. Inner extrusion 120 is also formed with a number (two shown in the figures, although any suitable number could be provided) of  
25 recesses 140 for receiving, for example, stainless steel pipes 150 for conveying a coolant fluid, such as water, to the inner extrusion 120 to enable heat to be transferred from the pillar 112 to the coolant fluid.

Thus, in use the pillar 112 provides:

- a corrosion resistant, robust upright support member of the pump enclosure 100, which is readily able to support loads of up to 100kg;



- a support for the control circuitry for the pump;
- a robust housing for the control circuitry for the pump which does not increase the size of the foot-print of the pump enclosure; and
- a heat sink for dissipating heat generated during use of the pump, which can keep temperatures at the control circuitry as low as possible. For example, with a pump generating, in use, temperatures in excess of 140°C, the temperature in the housing 124 in the pillar 112 can be readily maintained at around 35-45°C, typically at around 40°C.

In summary, a pump enclosure comprises a base, a plurality of pillars, and a cover. One of the pillars comprises interconnecting aluminium extrusions defining therebetween a housing for pump control circuitry. This pillar can also provide a heat sink for dissipating heat generated during use of a pump away from the control circuitry.

CLAIMS

1. A pump enclosure comprising a base, a cover, a plurality of pillars each detachably connected at one end thereof to the base and at the other end thereof to the cover, wherein at least one of the pillars comprises interconnected extrusions defining therebetween a housing for pump control means.
2. A pump enclosure according to Claim 1, wherein the extrusions are formed from thermally conductive material to dissipate heat away from the pump control means.
3. A pump enclosure according to Claim 1 or Claim 2, wherein at least one of the extrusions comprises means for receiving a heat exchange mechanism.
4. A pump enclosure according to Claim 3, wherein at least one of the extrusions is profiled to receive at least one pipe through which coolant fluid passes, in use.
5. A pump enclosure according to any preceding claim, wherein at least one of the extrusions is profiled to receive a printed circuit board assembly.
6. A pump enclosure according to any preceding claim, wherein one of the extrusions provides an outer wall for the pillar, the outer wall including at least one aperture for receiving connectors to control means located within the housing.
7. A pump enclosure according to any preceding claim, wherein one of the extrusions comprises a plurality of projections for engaging

correspondingly-profiled surfaces of the other extrusion to connect the extrusions together.

- 5 8. A pump enclosure according to any preceding claim, wherein the extrusions are formed from metal.
9. A pump enclosure according to any preceding claim, wherein the extrusions are formed from aluminium.
- 10 10. A pump enclosure according to any preceding claim, wherein the extrusions comprise a plurality of apertures for receiving bolt means for detachably connecting the pillar to the base and the cover.
- 15 11. A pump enclosure according to any preceding claim, wherein the pillars comprise corner pillars, and wherein one of the extrusions comprises a substantially L-shaped extrusion providing an outer wall for the corner pillar.
- 20 12. A pump enclosure according to Claim 11, wherein the base comprises at least one metal extrusion.
13. A pump enclosure according to Claim 12, wherein the base extrusion is profiled to receive at least one pipe through which coolant fluid passes, in use.
- 25 14. A pump enclosure according to Claim 12 or Claim 13, wherein the base extrusion is profiled to receive a plurality of wheels for the enclosure.
- 30 15. A pump enclosure according to any of Claims 12 to 14, wherein the base extrusion is profiled to receive one or more electrical cables.

16. A pump enclosure according to any of Claims 12 to 15, wherein the base comprises a plurality of interconnected metal extrusions.
17. A pump enclosure substantially as described herein with reference to the accompanying drawings.
18. A corner pillar of a pump enclosure, the pillar comprising interconnected extrusions defining therebetween a housing for pump control means, the extrusions being formed from thermally conductive material to dissipate heat away from the pump control means.
19. A corner pillar for a pump enclosure substantially as described herein with reference to the accompanying drawings.

**ABSTRACT**

A pump enclosure comprises a base, a plurality of pillars, and a cover. One of the  
5 pillars comprises interconnecting aluminium extrusions defining therebetween a  
housing for pump control circuitry. This pillar can also provide a heat sink for  
dissipating heat generated during use of a pump away from the control circuitry.

(Figure 1)

10

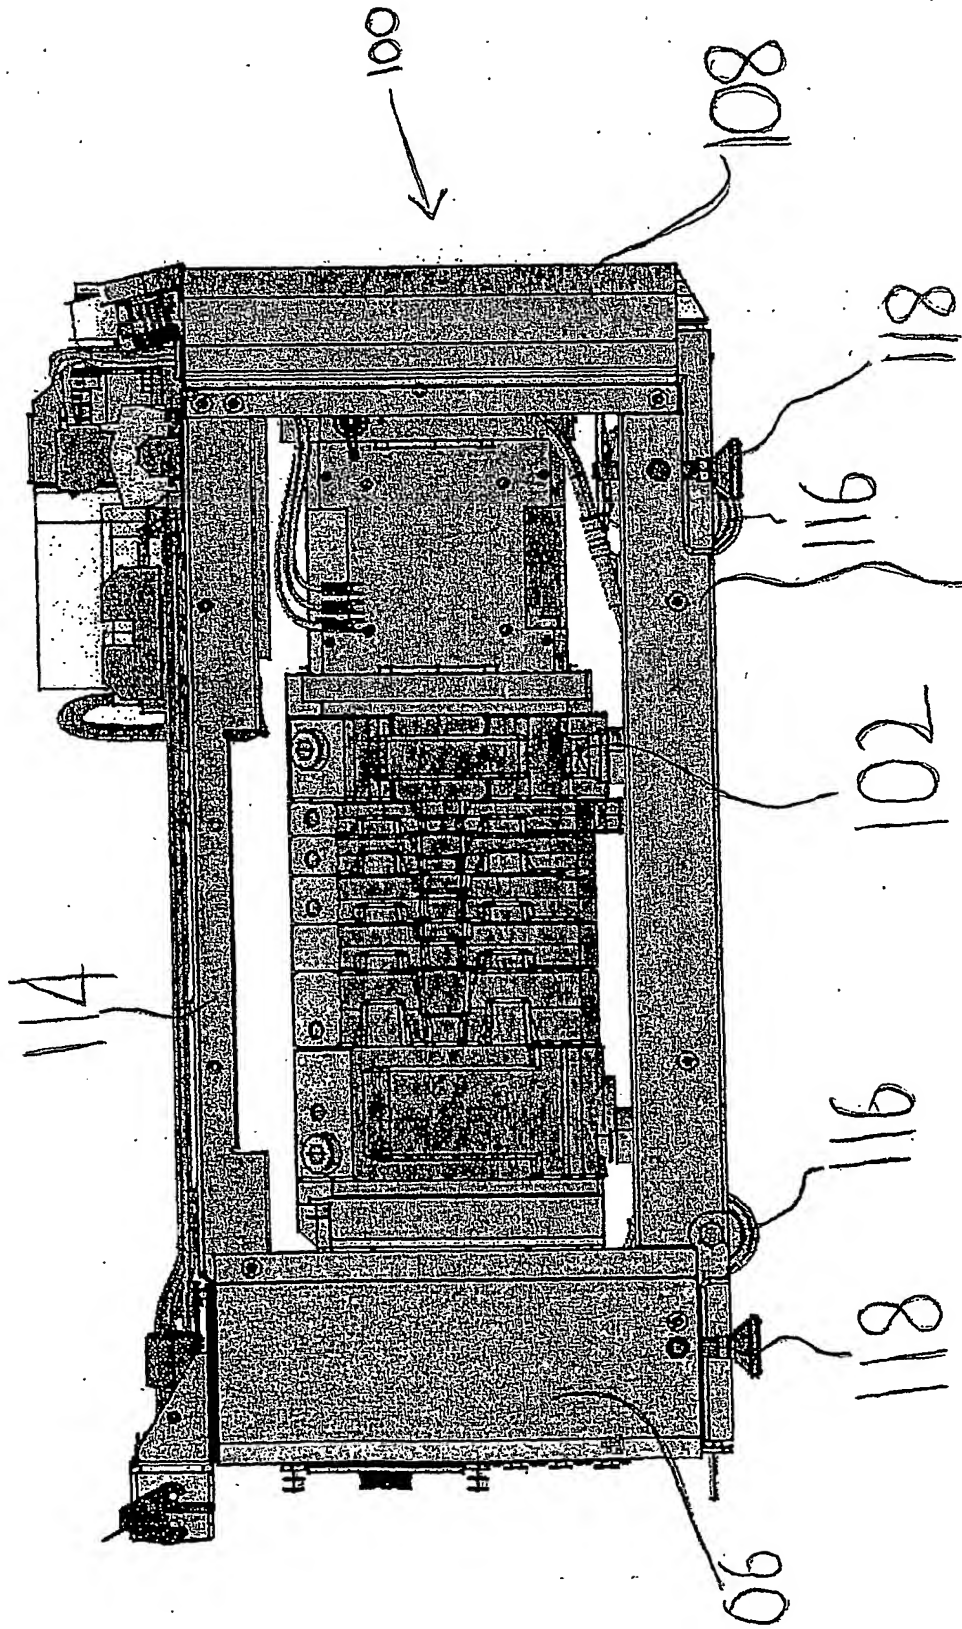


FIG. 1

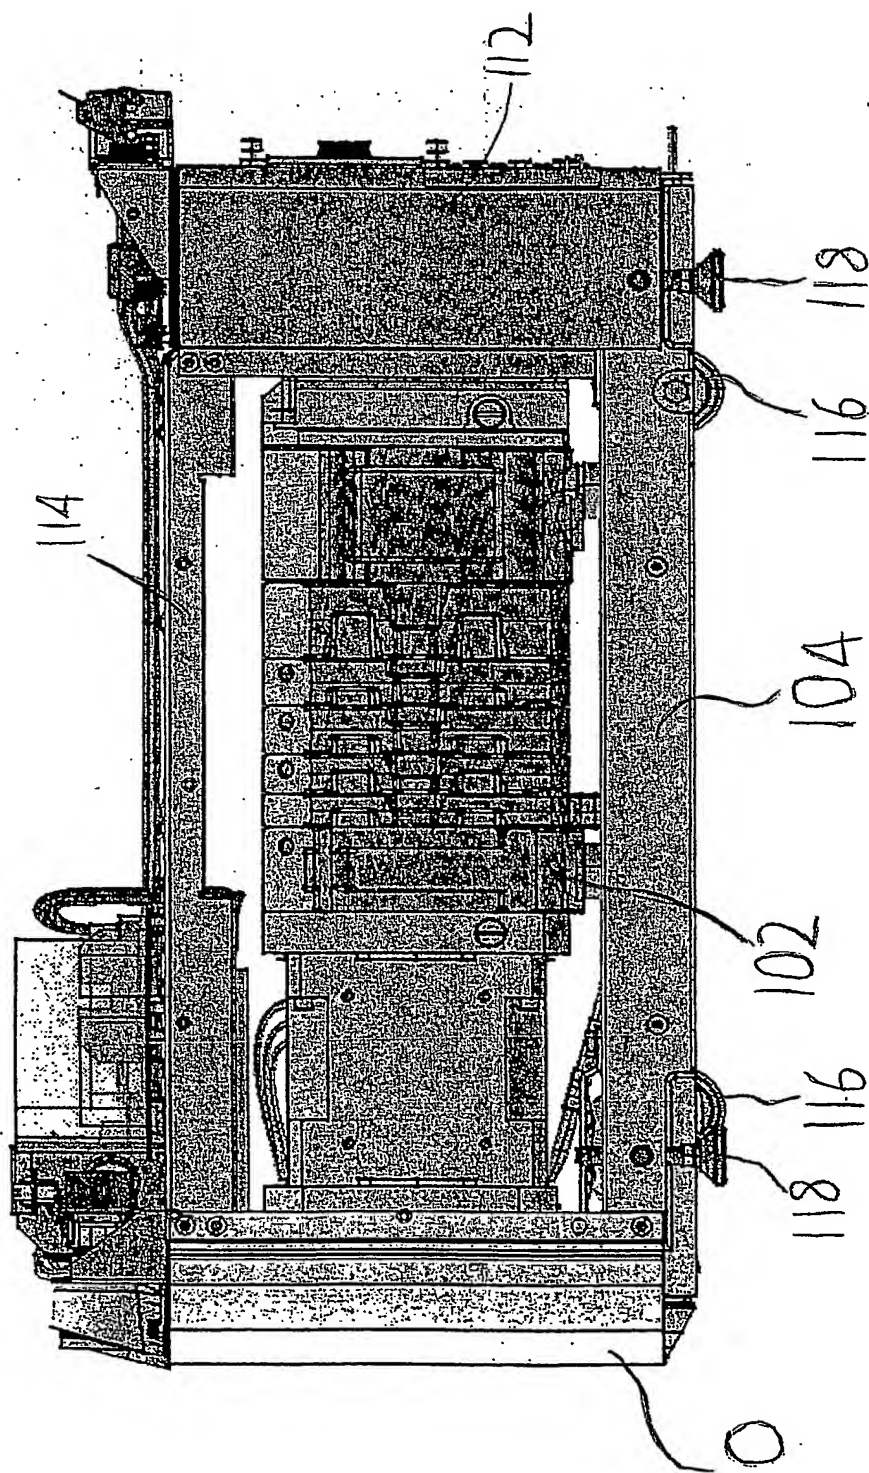


FIG. 2

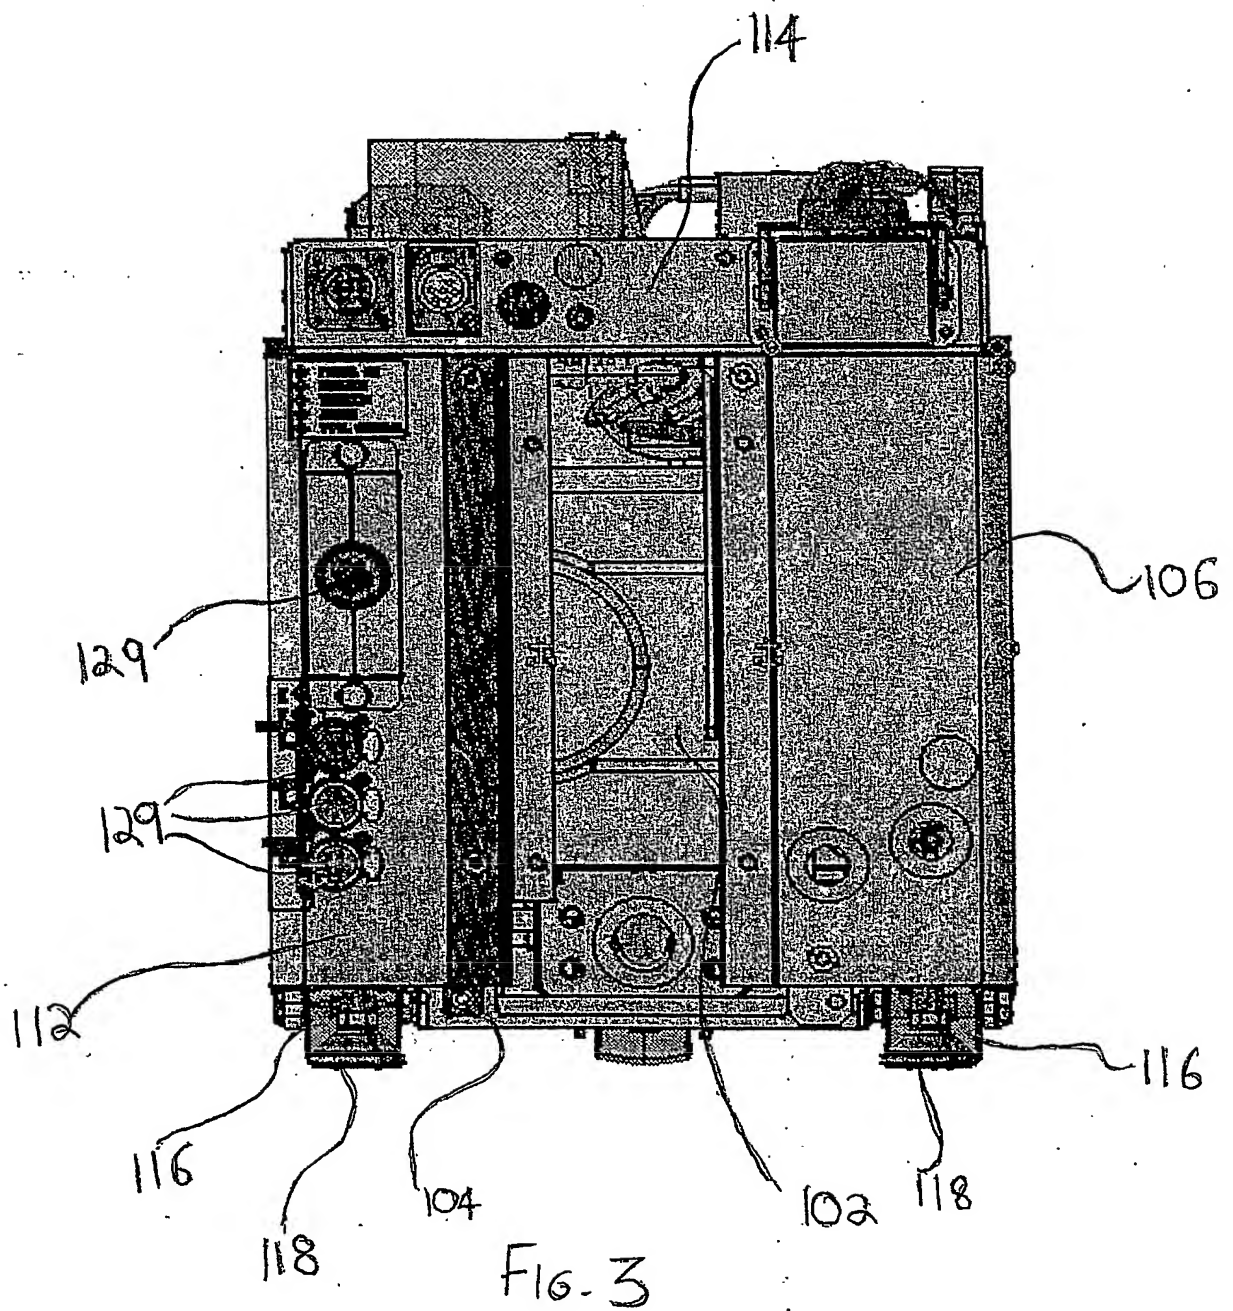
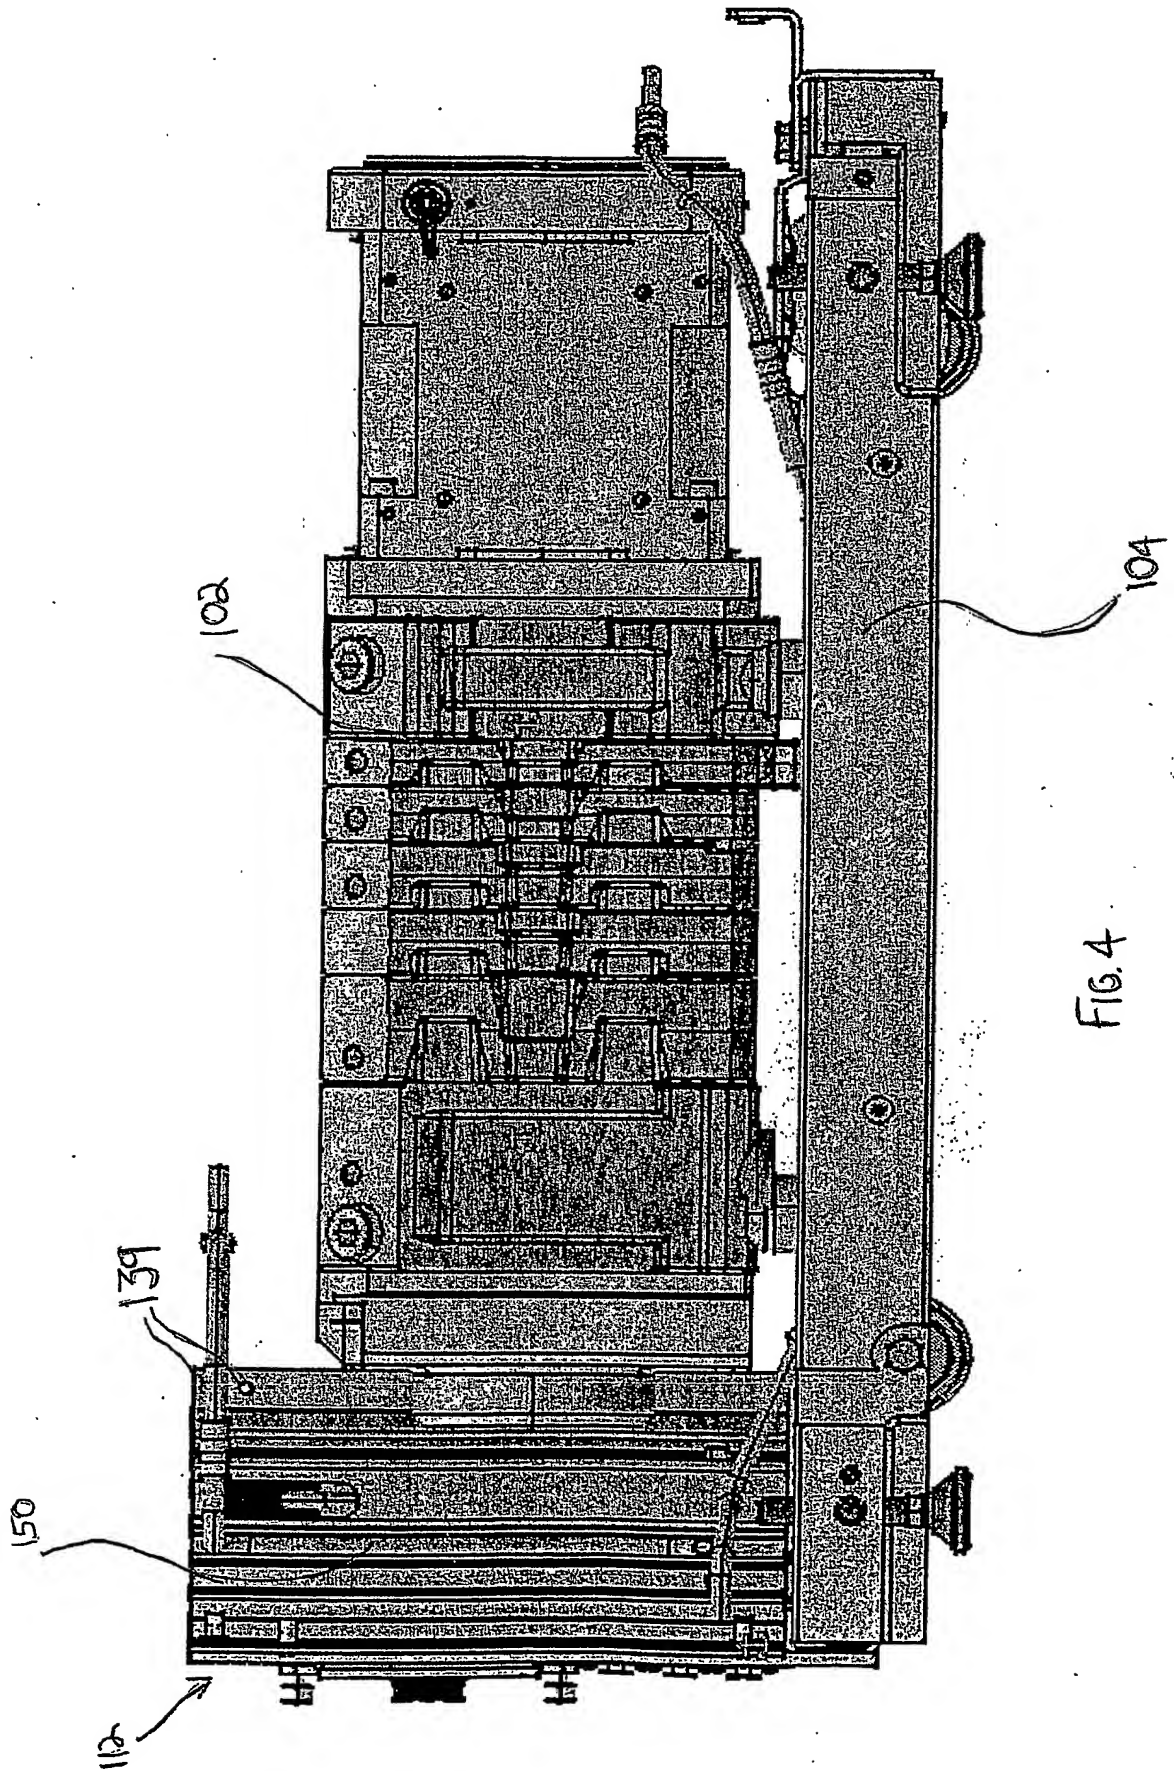


FIG. 3





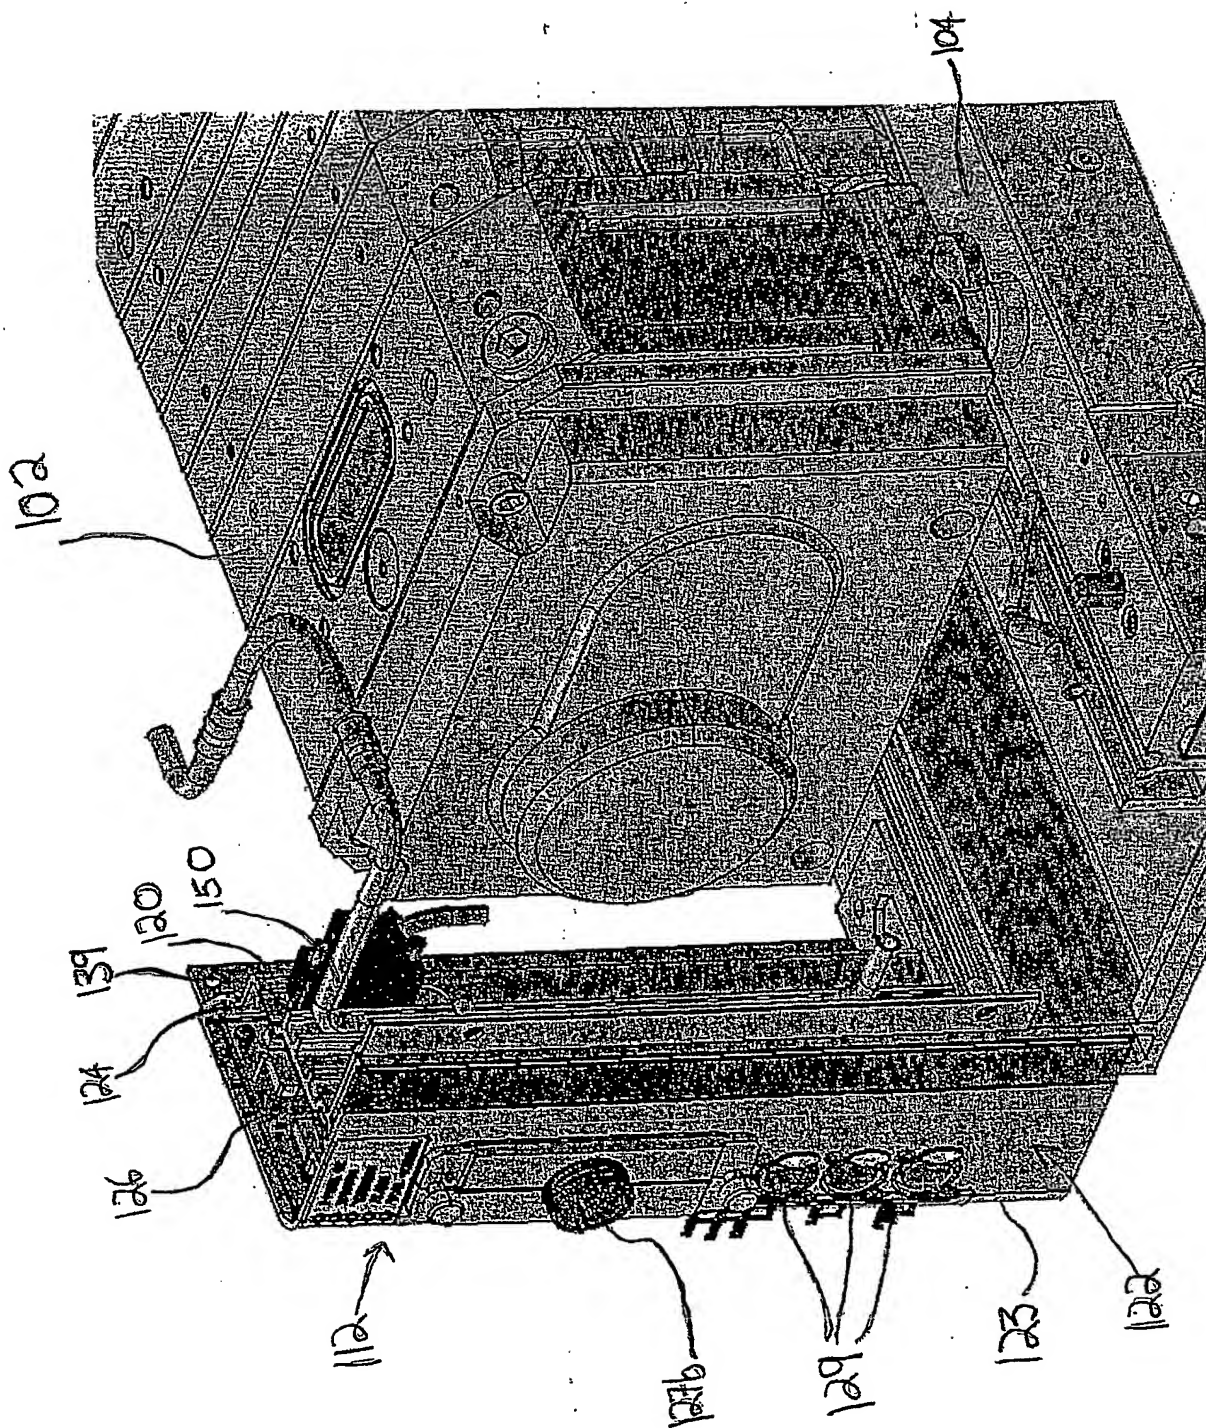


FIG. 5



718

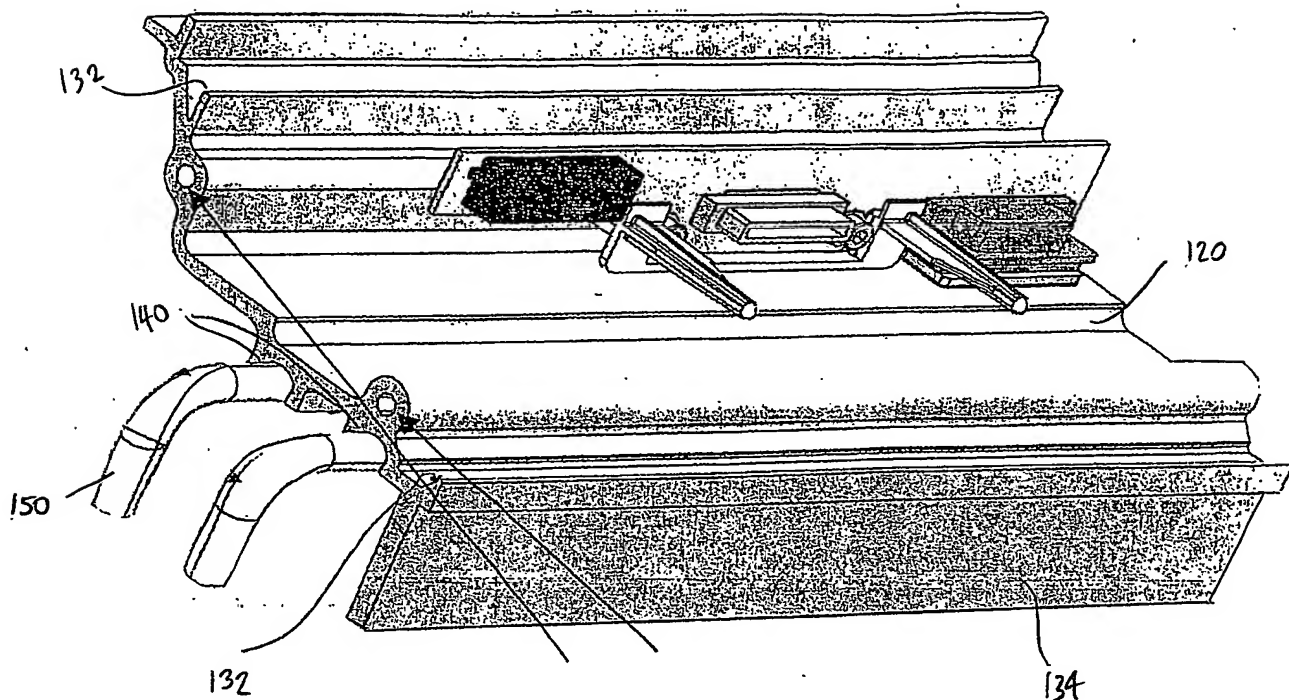


FIG. 7.

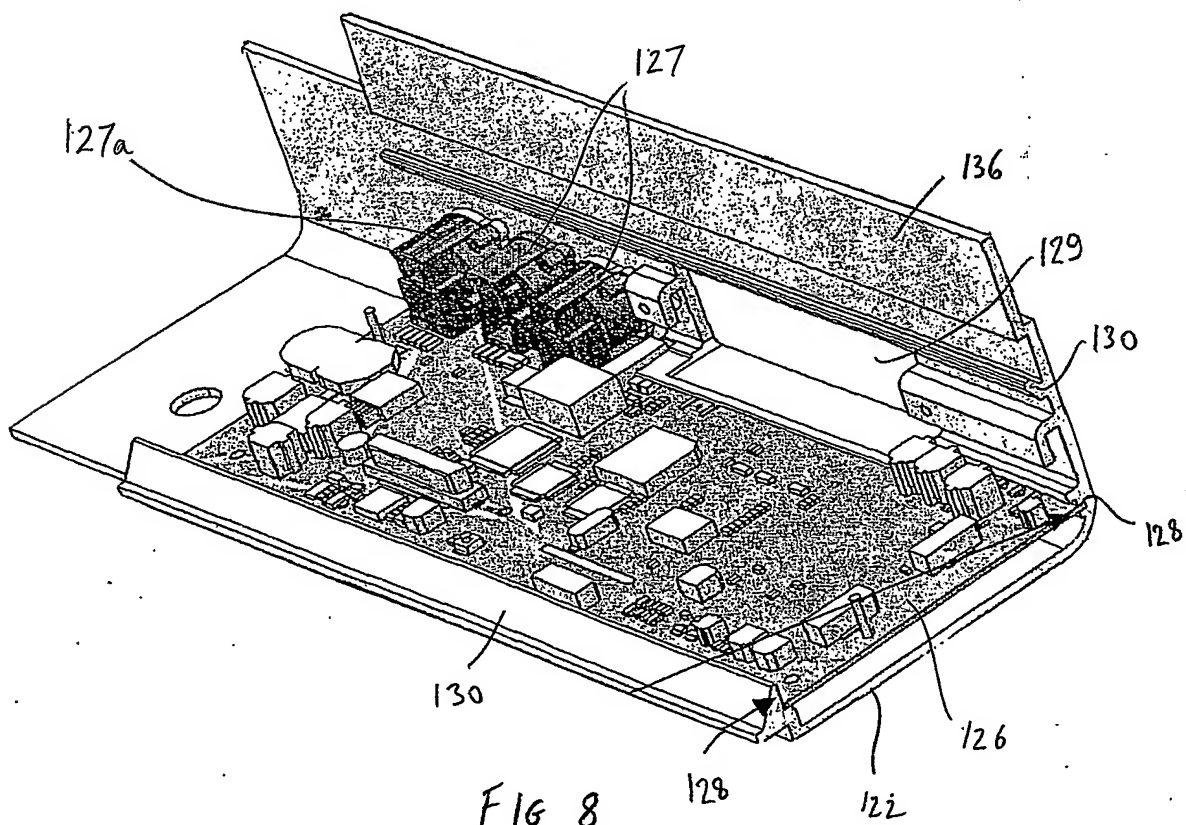


FIG. 8

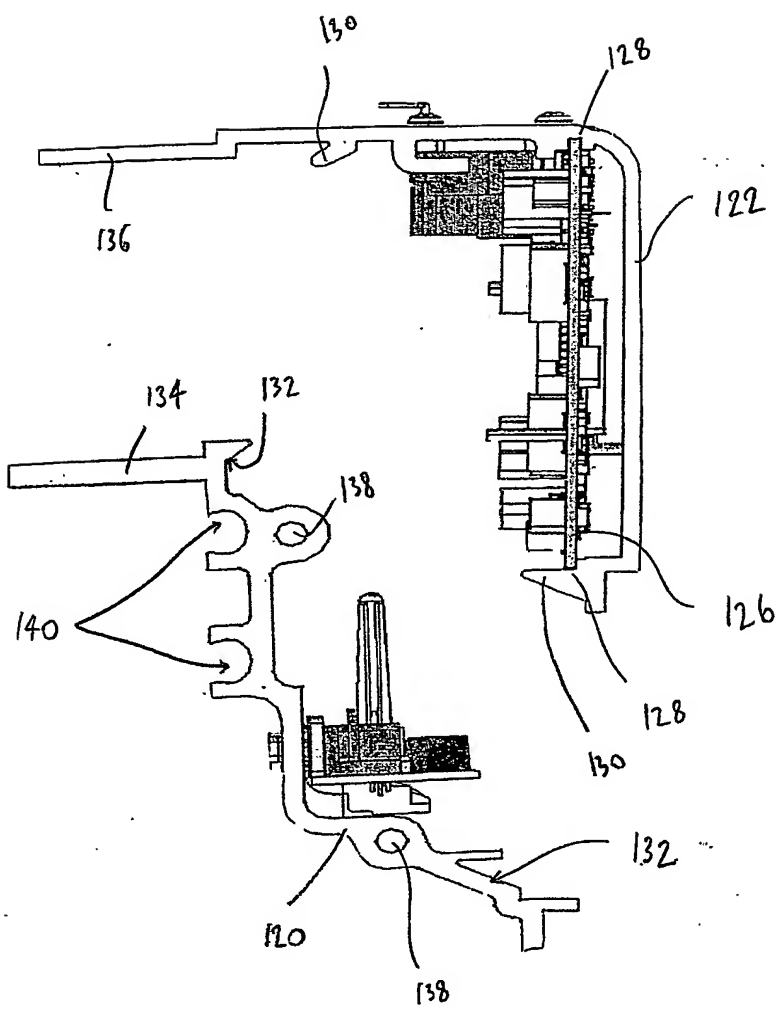


FIG. 9

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record.**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**